

2/7




Fig. 2





Fig. 3B


RPS920010041US1
Atherton, et al.

System and Method for Identifying One or More Optimum Configurations of Data

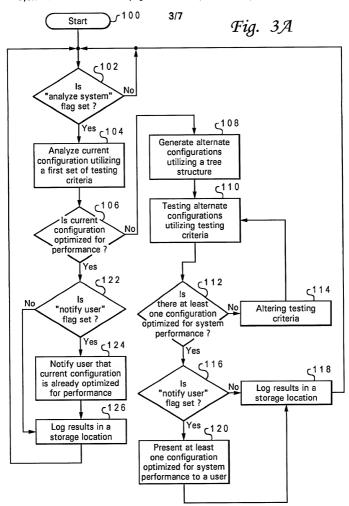

RPS920010041US1
Atherton, et al.

System and Method for Identifying One or More Optimum Configurations of Data

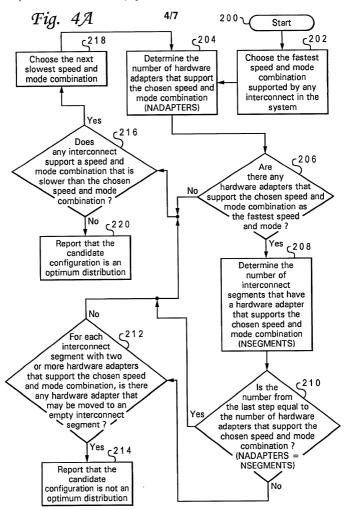

THE REAL PROPERTY AND ADDRESS OF THE PARTY ADDRESS OF THE PARTY AND ADDRESS OF THE PARTY ADDRESS O

RPS920010041US1

Atherton, et al.

System and Method for Identifying One or More Optimum Configurations of Data

5/7

Slots Supported in 133MHz PCI-X Mode	2	0	1	
Slots Supported Slots Supported in 66MHz in 100MHz in 133MHz PCI-X Mode PCI-X Mode	2	0	2	
Slots Supported in 66MHz PCI-X Mode	က	0	င	
Slots Supported in 66MHz in 66MHz Conventional Mode Mode	8	က	2	
Slots Supported in 33MHz Conventional Mode	က	ю	ю	
Bus	-	2	ო	

Fig. 4B

RPS920010041US1

Atherton, et al.

System and Method for Identifying One or More Optimum Configurations of Data

6/7

	Fig. 4C		Fig. 4D		Fig. 4E
3 133X	_ ი	Ī	- X99	Ţ	- ი
	∞	3 66X	∞	е Ж	∞
	r		7 66X		7 66X (X-1
2 66C	6 — bution)		(spe		
	5 — r Distri	2 66C	4 5 6 — — — (Mixed Speeds)	2 66C	5 66X al Mixe
	4 5 6 7 7 9 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	_	4 <u>%</u>	_	4 66C
		-	Гх	-	ۇ
	39		86X		ا _د ر
1 66C	2 66C	1 66X	2 133X	1 33C	1 2 33C 33C
	1 99C	_	1 133X	_	330
Bus Number: Speed/Mode:	Slot Number: Card Type:	Bus Number: Speed/Mode:	Slot Number: Card Type:	Bus Number: Speed/Mode:	Slot Number: Card Type:

RPS920010041US1
Atherton, et al.
System and Method for Identifying One or More Optimum Configurations of Data

7/7

